WALL MOUNTING MODEL 20-70m³/h

- Fixing by Elastic hooks (otherwise by four self-threading screws).
- It is important that the ambient was cleaned and the external temperature was lower than the internal one.
- Each filter fan needs a specific filter grill (MGF) for the inlet and outlet airflow.
- Using the continues current version you avoid all kind of interference
- Each model can be transformed, on request, in extracting version with a rotation of the fan (Version V = 1).
- Filter elements are made of unbreakable synthetic fibre and can be easily cleaned by rinsing or shaking. A 6 spare filter elements kit (PF***) can be provided, upon request, for each fan model.
- Type of material: ABS/PC alloy according to UL94V0.
- Storage temperature: -45°C to +75°C.
- Lifetime L10 at 40°C: 50.000h.
- Type of Filter Element: Self-Extinguishing.
- Type of Bearing: Shielded Ball.
- Filtering Class: Class G3 according to EN 779 (EU4 DIN 24185).
- Separation Degree: 85% - DIN 24185.
- Dust Retention Capacity: 600g/m^2.
- Filter Element is washable for about 10 times.
- Standard Colour: RAL7035



Filter and fan		**MVP023(V)*TE**	**MVP023(V)*PE**	**MVP023(V)*JE**
voltage rated/ current rated	*50Hz*	230V/70mA	115V/140mA	24V DC/190 mA
	60Hz	230V/60mA	115V/120mA	
Filter grill		**MGF023E**		
Max Air Flow		23 / 30 m³/h	23 / 30 m³/h	33 m³/h
Air rate with filter grill		1 x **MGF023E**: 15/18 m³/h		
Power	*50Hz*	14 W	12 W	4,56 W
	60Hz	12 W	9 W	
Noise level	*50Hz*	32 dB(A)		38 dB(A)
	60Hz	36 dB(A)		
Temperature range		From -10°C to +55°C		
Protection standard		IP54 Standard.		
* Version(V)		(V)0 = Blow-Into →| (V)1 = Extracting ←|		
Drilling Template		□ 91,5 mm (0+1,5)		
Available accessories		Spare filter kit PF***.		





Filter and fan		**MVP063(V)*TE**	**MVP063(V)*PE**	**MVP063(V)*JE**
voltage rated/ current rated	*50Hz*	230 V/ 100 mA	115 V/ 200 mA	24V DC/300 mA
	60Hz	230 V/ 80 mA	115 V/ 160 mA	
Filter grill		**MGF063E**		
Fan air flow *free flow*		57 / 61 m³/h	57 / 61 m³/h	85 m³/h
Air rate with filter grill		1 x **MGF063E**: 43/50 m³/h		
Power	*50Hz*	17 W	14 W	7,2 W
	60Hz	15 W	12 W	
Noise level	*50Hz*	42 dB(A)		47 dB(A)
	60Hz	46 dB(A)		
Temperature range		-10° C +55° C		
Protection standard		IP54 Standard.		
* Version(V)		(V)0 = Blow-Into →| (V)1 = Extracting ←|		
Drilling Template		□ 125 mm (0+1,5)		
Available accessories		Spare filter kit PF***		






MKS S.r.l. - Società unipersonale - Tel.: +39 011 6898511
E-mail: info@mksclima.com Web: www.mksclima.com


Ver.: 25/03/2014

WE RESERVE THE RIGHT TO MAKE TECHNICAL MODIFICATIONS.


MVP023xxx

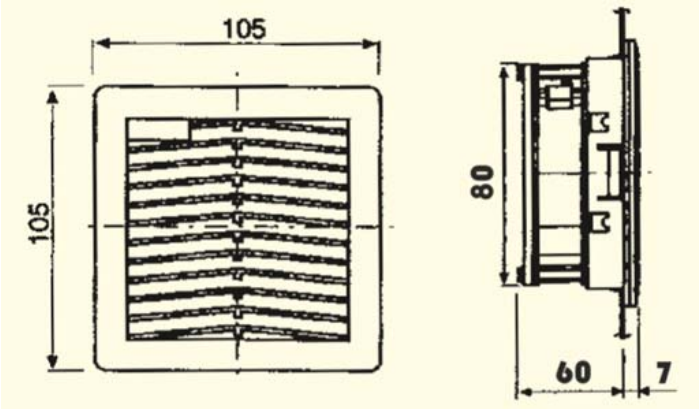


MVP063xxx

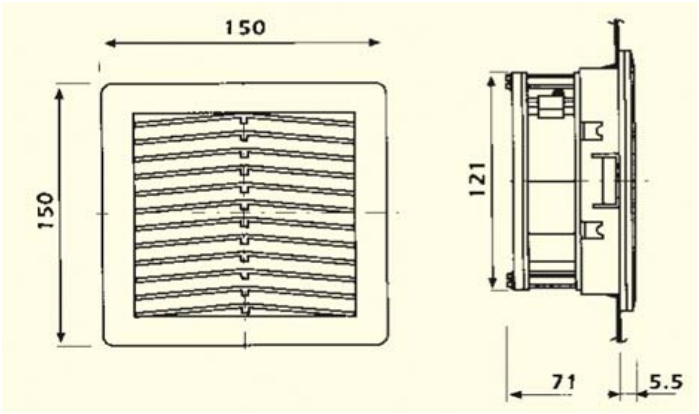

MVP0230xx

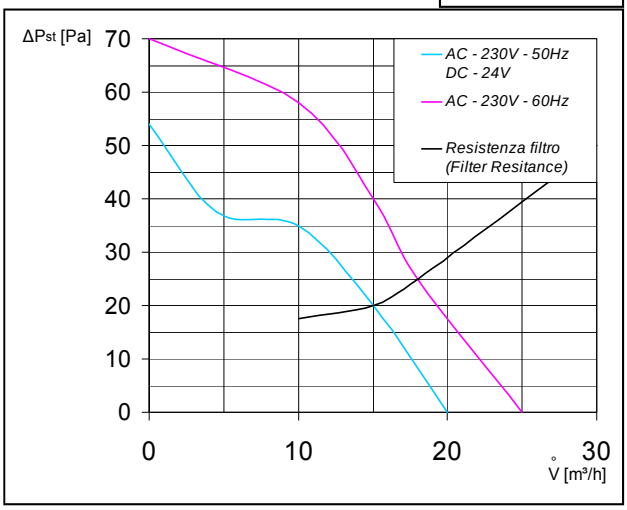

MVP0630xx

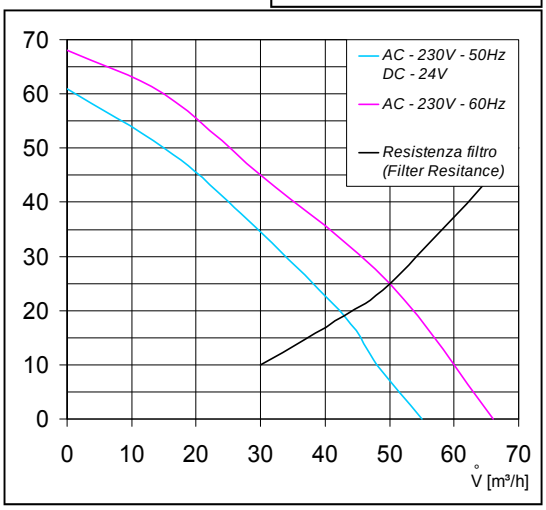

WE RESERVE THE RIGHT TO MAKE TECHNICAL MODIFICATIONS.

WALL MOUNTING MODEL 105-270m³/h

- Fixing by Elastic hooks (otherwise by four self-threading screws).
- It is important that the ambient was cleaned and the external temperature was lower than the internal one.
- Each filter fan needs a specific filter grill (MGF) for the inlet and outlet airflow.
- Using the continues current version you avoid all kind of interference
- Each model can be transformed, on request, in extracting version with a rotation of the fan (Version V = 1).
- Filter elements are made of unbreakable synthetic fibre and can be easily cleaned by rinsing or shaking. A 6 spare filter elements kit (PF***) can be provided, upon request, for each fan model.
- Type of material: ABS/PC alloy according to UL94V0.
- Storage temperature: -45°C to +75°C.
- Lifetime L10 at 40°C: 50.000h.
- Type of Filter Element: Self-Extinguishing.
- Type of Bearing: Shielded Ball.
- Filtering Class: Class G3 according to EN 779 (EU4 DIN 24185).
- Separation Degree: 85% - DIN 24185.
- Dust Retention Capacity: 600g/m^2.
- Filter Element is washable for about 10 times.
- Standard Colour: RAL7035



Filter and fan		MVP123(V)*TE	MVP123(V)*PE	MVP123(V)*JE
voltage rated/ current rated	50Hz	230V/100mA	115V/200mA	24V DC/300 mA
	60Hz	230V/80mA	115V/160mA	
Filter grill		**MGF123E**		
Max Air Flow		120 / 135 m³/h	120 / 135 m³/h	110 m³/h
Air rate with filter grill		1xMGF123E:71/82 m³/h 2xMGF123E:85/98 m³/h		
Power	50Hz	17 W	14 W	7,2 W
	60Hz	15 W	12 W	
Noise level	50Hz	42 dB(A)		47 dB(A)
	60Hz	46 dB(A)		
Temperature range		From -10°C to +55°C		
Protection standard		IP54 Standard.		
* Version(V)		(V)0 = Blow-Into →| (V)1 = Extracting ←|		
Drilling Template		☐ 177 mm (0+1,5)		
Available accessories		Spare filter kit PF***.		





Filter and fan		MVP253(V)*TE	MVP253(V)*PE	MVP253(V)*JE
voltage rated/ current rated	50Hz	230 V/ 230 mA	115 V/ 430 mA	24V DC/1080 mA
	60Hz	230 V/ 180 mA	115 V/ 360 mA	
Filter grill		**MGF253E**		
Fan air flow *free flow*		240 / 270 m³/h	240 / 270 m³/h	240 m³/h
Air rate with filter grill		1xMGF253E:170/205 m³/h 2xMGF253E:200/230 m³/h		
Power	50Hz	35 W	32 W	26 W
	60Hz	30 W	28 W	
Noise level	50Hz	50 dB(A)		61 dB(A)
	60Hz	55 dB(A)		
Temperature range		-10° C +55° C		
Protection standard		IP54 Standard.		
* Version(V)		(V)0 = Blow-Into →| (V)1 = Extracting ←|		
Drilling Template		☐ 223 mm (0+1,5)		
Available accessories		Spare filter kit PF***		






MKS S.r.l. - Società unipersonale - Tel.: +39 011 6898511
E-mail: info@mksclima.com Web: www.mksclima.com


Ver.: 25/03/2014

WE RESERVE THE RIGHT TO MAKE TECHNICAL MODIFICATIONS.


MVP123xxx

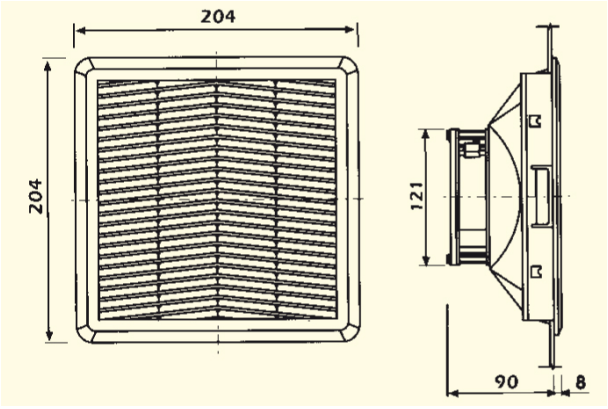


MVP253xxx

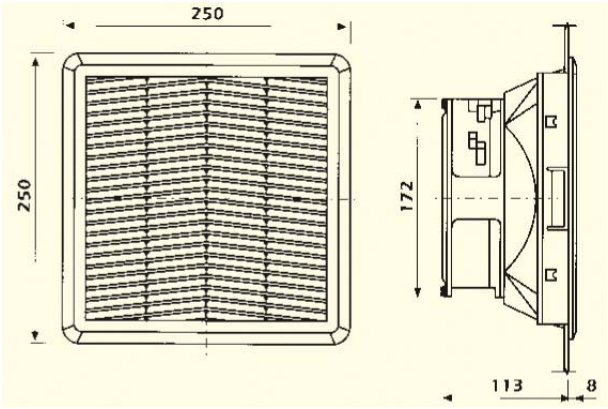

MVP123xxx

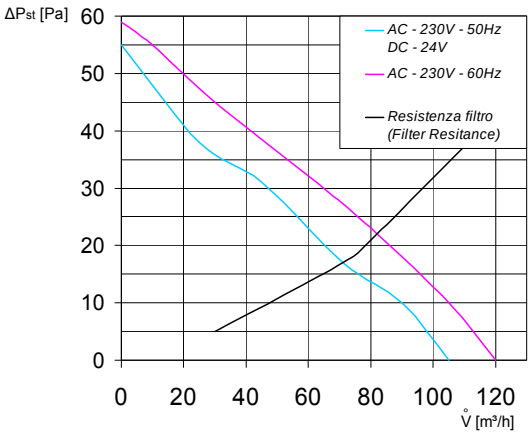

MVP253xxx

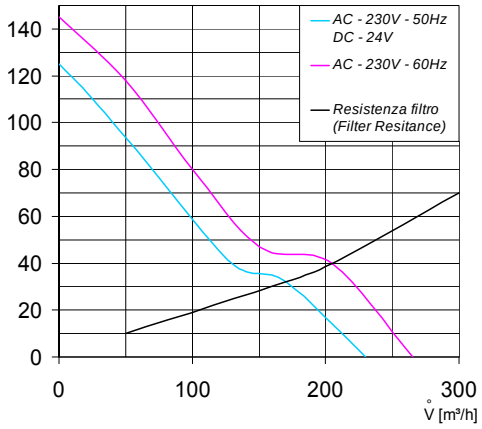

WE RESERVE THE RIGHT TO MAKE TECHNICAL MODIFICATIONS.

WALL MOUNTING MODEL 500 m³/h



- Fixing by Elastic hooks (otherwise by four self-threading screws).
- It is important that the ambient was cleaned and the external temperature was lower than the internal one.
- Each filter fan needs a specific filter grill (MGF) for the inlet and outlet airflow.
- Using the continues current version you avoid all kind of interference
- Each model can be transformed, on request, in extracting version with a rotation of the fan (Version V = 1).
- Filter elements are made of unbreakable synthetic fibre and can be easily cleaned by rinsing or shaking. A 6 spare filter elements kit (PF***) can be provided, upon request, for each fan model.
- Type of material: ABS/PC alloy according to UL94V0.
- Storage temperature: -45°C to +75°C.
- Lifetime L10 at 40°C: 50.000h.
- Type of Filter Element: Self-Extinguishing.
- Type of Bearing: Shielded Ball.
- Filtering Class: Class G3 according to EN 779 (EU4 DIN 24185).
- Separation Degree: 85% - DIN 24185.
- Dust Retention Capacity: 600g/m^2.
- Filter Element is washable for about 10 times.
- Standard Colour: RAL7035




Filter and fan		**MVP503(V)*TE**	**MVP503(V)*PE**	
voltage rated/ current rated	*50Hz*	230V/290mA	115V/580mA	
	60Hz	230V/350mA	115V/700mA	
Filter grill		**MGF503E**		
Max Air Flow		520 / 580 m³/h	520 / 580 m³/h	
Air rate with filter grill		1xMGF503E:360/390 m³/h 2xMGF503E:440/495 m³/h		
Power	*50Hz*	80 W	72 W	
	60Hz	74 W	65 W	
Noise level	*50Hz*	63 dB(A)		
	60Hz	65 dB(A)		
Temperature range		From -10°C to +55°C		
Protection standard		IP54 Standard.		
* Version(V)		(V)0 = Blow-Into →|	(V)1 = Extracting ←|	
Drilling Template		☐ 291 mm (0+1,5)		
Available accessories		Spare filter kit PF***.		




WE RESERVE THE RIGHT TO MAKE TECHNICAL MODIFICATIONS.

MVP503xxx

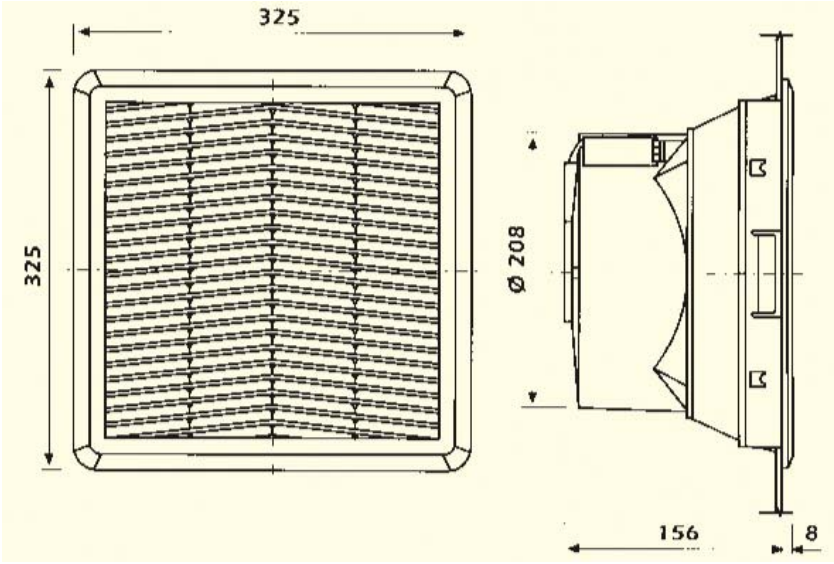

MVP503xxx

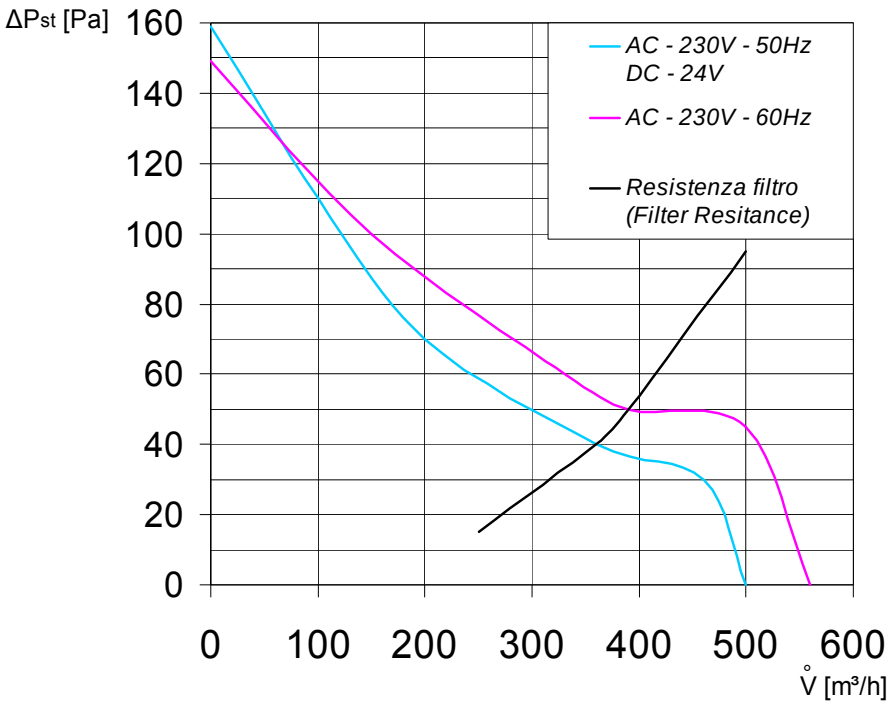

WE RESERVE THE RIGHT TO MAKE TECHNICAL MODIFICATIONS.